


## Chapter 2

# Memory Hierarchy Design

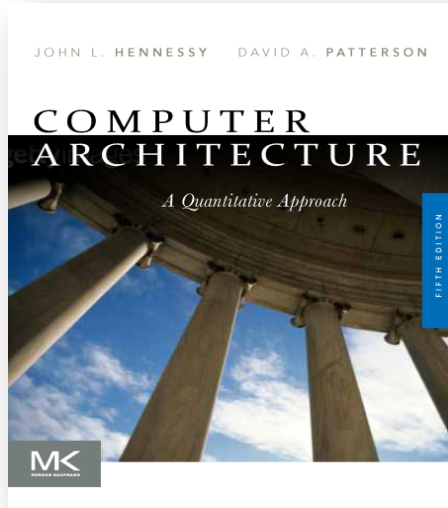


# Memory Hierarchy Basics

- Six basic cache optimizations:
  - Larger block size
    - Reduces compulsory misses
    - Increases capacity and conflict misses, increases miss penalty
  - Larger total cache capacity to reduce miss rate
    - Increases hit time, increases power consumption
  - Higher associativity
    - Reduces conflict misses
    - Increases hit time, increases power consumption
  - Higher number of cache levels
    - Reduces overall memory access time
  - Giving priority to read misses over writes
    - Reduces miss penalty
  - Avoiding address translation in cache indexing
    - Reduces hit time

# Ten Advanced Optimizations


- Small and simple first level caches
  - Critical timing path:
    - addressing tag memory, then
    - comparing tags, then
    - selecting correct set
  - Direct-mapped caches can overlap tag compare and transmission of data
  - Lower associativity reduces power because fewer cache lines are accessed

# L1 Size and Associativity

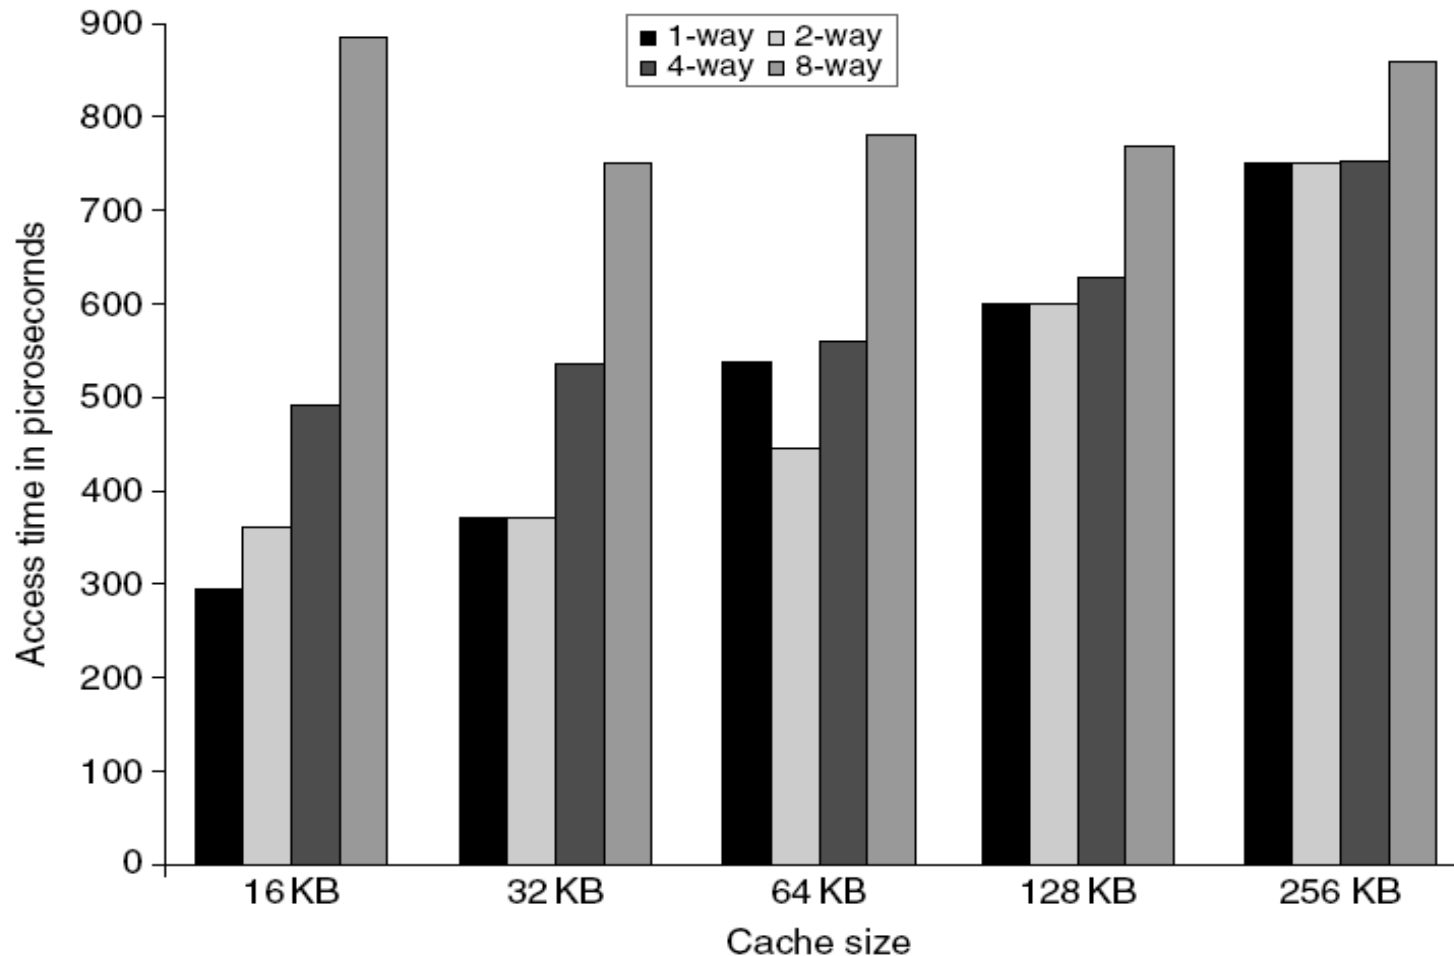

Access time vs. size and associativity

# L1 Size and Associativity

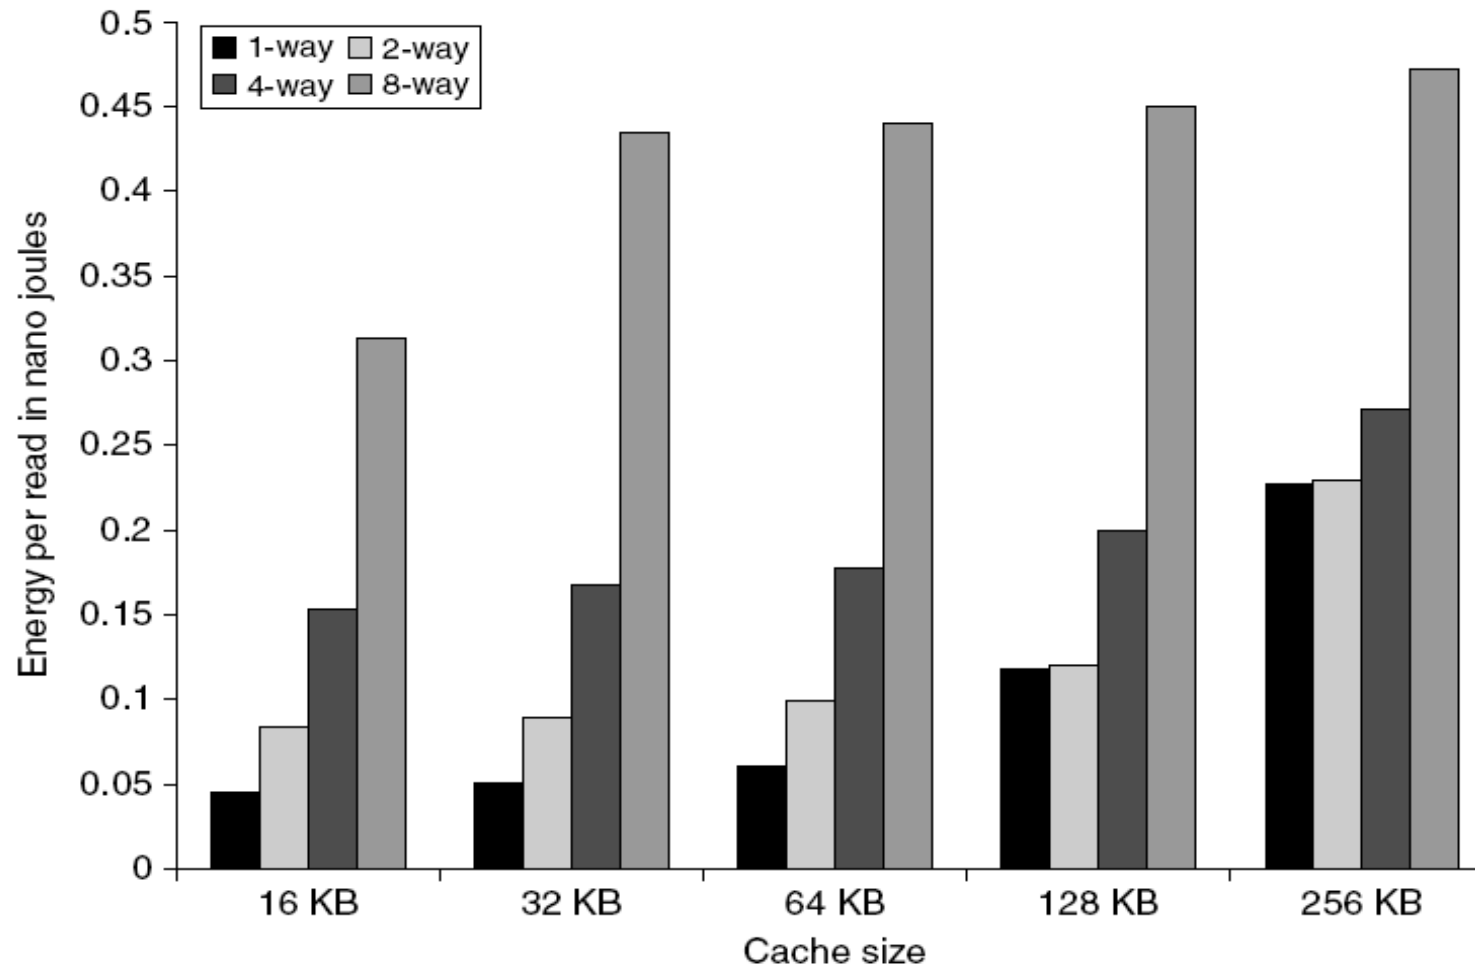

Energy per read vs. size and associativity

# Way Prediction


- To improve hit time, predict the way to pre-set mux
  - Mis-prediction gives longer hit time
  - Prediction accuracy
    - > 90% for two-way
    - > 80% for four-way
    - I-cache has better accuracy than D-cache
  - First used on MIPS R10000 in mid-90s
  - Used on ARM Cortex-A8
- Extend to predict block as well
  - “Way selection”
  - Increases mis-prediction penalty

# Pipelining Cache

- Pipeline cache access to improve bandwidth
  - Examples:
    - Pentium: 1 cycle
    - Pentium Pro – Pentium III: 2 cycles
    - Pentium 4 – Core i7: 4 cycles
- Increases branch mis-prediction penalty
- Makes it easier to increase associativity

# Nonblocking Caches


- Allow hits before previous misses complete
  - “Hit under miss”
  - “Hit under multiple miss”
- L2 must support this
- In general, processors can hide L1 miss penalty but not L2 miss penalty

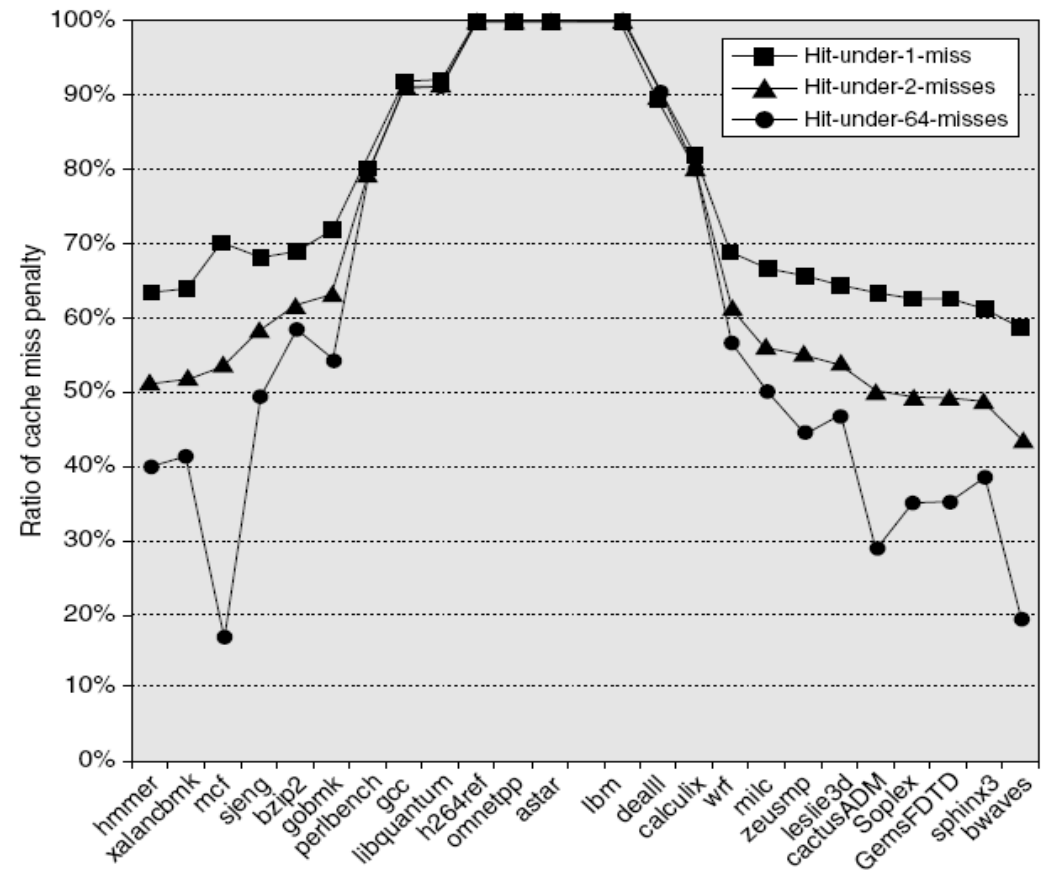



# Multibanked Caches

- Organize cache as independent banks to support simultaneous access
  - ARM Cortex-A8 supports 1-4 banks for L2
  - Intel i7 supports 4 banks for L1 and 8 banks for L2
  
- Interleave banks according to block address

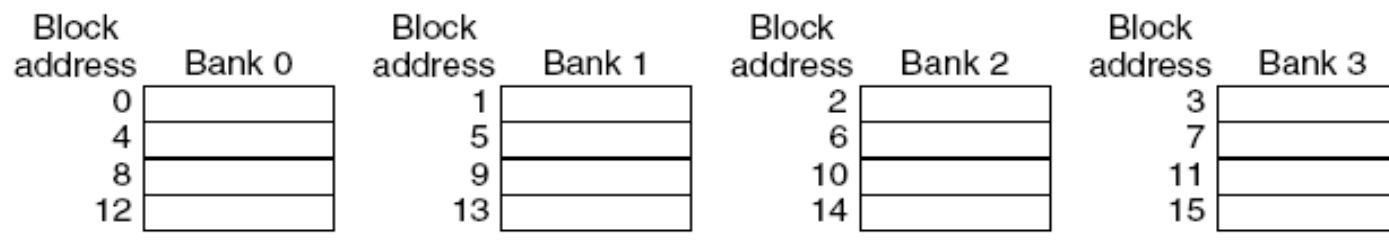

**Figure 2.6** Four-way interleaved cache banks using block addressing. Assuming 64 bytes per blocks, each of these addresses would be multiplied by 64 to get byte addressing.

# Critical Word First, Early Restart

- Critical word first
  - Request missed word from memory first
  - Send it to the processor as soon as it arrives
- Early restart
  - Request words in normal order
  - Send missed work to the processor as soon as it arrives
- Effectiveness of these strategies depends on block size and likelihood of another access to the portion of the block that has not yet been fetched

# Merging Write Buffer

- When storing to a block that is already pending in the write buffer, update write buffer
- Reduces stalls due to full write buffer
- Do not apply to I/O addresses

Write address	V		V		V		V
100	1	Mem[100]	0		0		0
108	1	Mem[108]	0		0		0
116	1	Mem[116]	0		0		0
124	1	Mem[124]	0		0		0

No write buffering

Write address	V		V		V		V	
100	1	Mem[100]	1	Mem[108]	1	Mem[116]	1	Mem[124]
	0		0		0		0	
	0		0		0		0	
	0		0		0		0	

Write buffering

# Compiler Optimizations

- Loop Interchange
  - Swap nested loops to access memory in sequential order
- Blocking
  - Instead of accessing entire rows or columns, subdivide matrices into blocks
  - Requires more memory accesses but improves locality of accesses

# Course outline

## The architecture from the programmer's view point

10000x10000 array, Intel Core 2 Duo @ 2.8 Ghz

```
int sum1(int** m, int n) {  
    int i,j,sum=0;  
    for (i=0; i<n;i++)  
        for (j=0; j<n; j++)  
            sum += m[i][j];  
    return sum;  
}
```

**0.4 seconds**

```
int sum2(int** m, int n) {  
    int i,j,sum=0;  
    for (i=0; i<n;i++)  
        for (j=0; j<n; j++)  
            sum += m[j][i];  
    return sum;  
}
```

**1,7 seconds**  
**(4.2 times slower !!)**

# Course outline

## Loop interchange

Assume  $m[,]$  is allocated in *row-major order*

```
int sum2(int** m, int n) {  
    int i,j,sum=0;  
    for (i=0; i<n;i++)  
        for (j=0; j<n; j++)  
            sum += m[j][i];  
    return sum;  
}
```


**wrong**

```
int sum2(int** m, int n) {  
    int i,j,sum=0;  
    for (j=0; j<n;j++)  
        for (i=0; i<n; i++)  
            sum += m[j][i];  
    return sum;  
}
```

**correct**

# Hardware Prefetching

- Fetch two blocks on miss (include next sequential block)

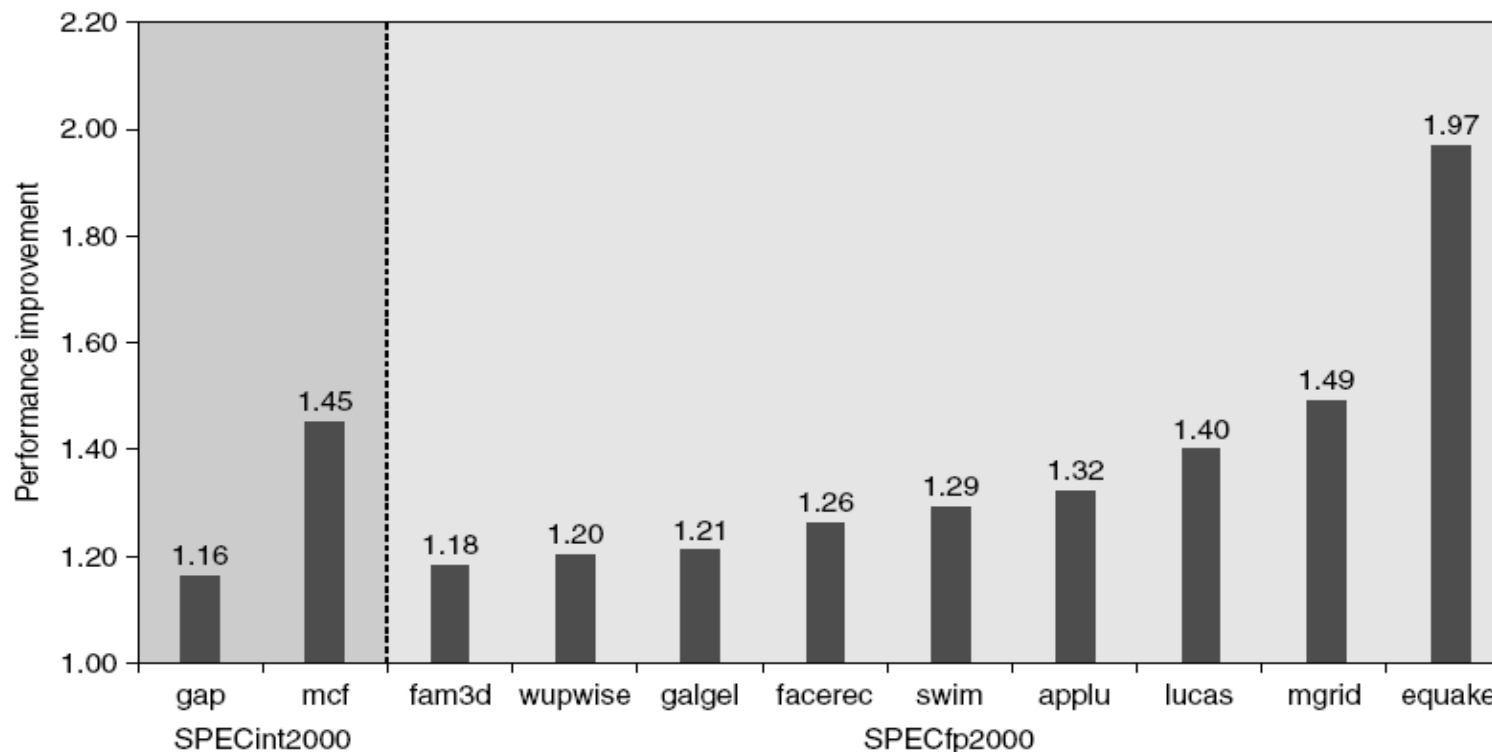

## Pentium 4 Pre-fetching

# Compiler Prefetching

- Insert prefetch instructions before data is needed
- Non-faulting: prefetch doesn't cause exceptions
- Register prefetch
  - Loads data into register
- Cache prefetch
  - Loads data into cache
- Combine with loop unrolling and software pipelining



# Summary

Technique	Hit time	Band-width	Miss penalty	Miss rate	Power consumption	Hardware cost/complexity	Comment
Small and simple caches	+			-	+	0	Trivial; widely used
Way-predicting caches	+				+	1	Used in Pentium 4
Pipelined cache access	-	+				1	Widely used
Nonblocking caches		+	+			3	Widely used
Banked caches		+			+	1	Used in L2 of both i7 and Cortex-A8
Critical word first and early restart			+			2	Widely used
Merging write buffer			+			1	Widely used with write through
Compiler techniques to reduce cache misses				+		0	Software is a challenge, but many compilers handle common linear algebra calculations
Hardware prefetching of instructions and data			+	+	-	2 instr., 3 data	Most provide prefetch instructions; modern high-end processors also automatically prefetch in hardware.
Compiler-controlled prefetching			+	+		3	Needs nonblocking cache; possible instruction overhead; in many CPUs

**Figure 2.11** Summary of 10 advanced cache optimizations showing impact on cache performance, power consumption, and complexity. Although generally a technique helps only one factor, prefetching can reduce misses if done sufficiently early; if not, it can reduce miss penalty. + means that the technique improves the factor, - means it hurts that factor, and blank means it has no impact. The complexity measure is subjective, with 0 being the easiest and 3 being a challenge.